

FBP22WC080N2U6R1W

## FIXED CASTOR Ø 80 MM SERIES N2U6 ROLLER BEARING

### WHEEL

|                      |                                        |
|----------------------|----------------------------------------|
| wheel diameter in mm | 80                                     |
| wheel width in mm    | 32                                     |
| hub width in mm      | 40                                     |
| screw size           | M8                                     |
| tread                | thermopl. polyurethane 95° shore A red |
| wheel center         | polyamide grey                         |
| bearing              | roller bearing                         |
| threadguard          | small metal threadguard                |
| temperature range    | -40°C to +80°C                         |



### HOUSING


|                                  |              |
|----------------------------------|--------------|
| material thickness fitting in mm | 2.00         |
| material thickness fork in mm    | 2.00         |
| fitting                          | plate        |
| mounting dimension in mm         | 80 / 77 x 60 |
| offset dimension in mm           | 0            |
| total height in mm               | 105          |
| swivel radius in mm              | 0            |
| dyn. load capacity in kg         | 130          |
| test norm                        | DIN EN 12532 |

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu

FBP22WC080N2U6R1W

## FIXED CASTOR Ø 80 MM SERIES N2U6 ROLLER BEARING

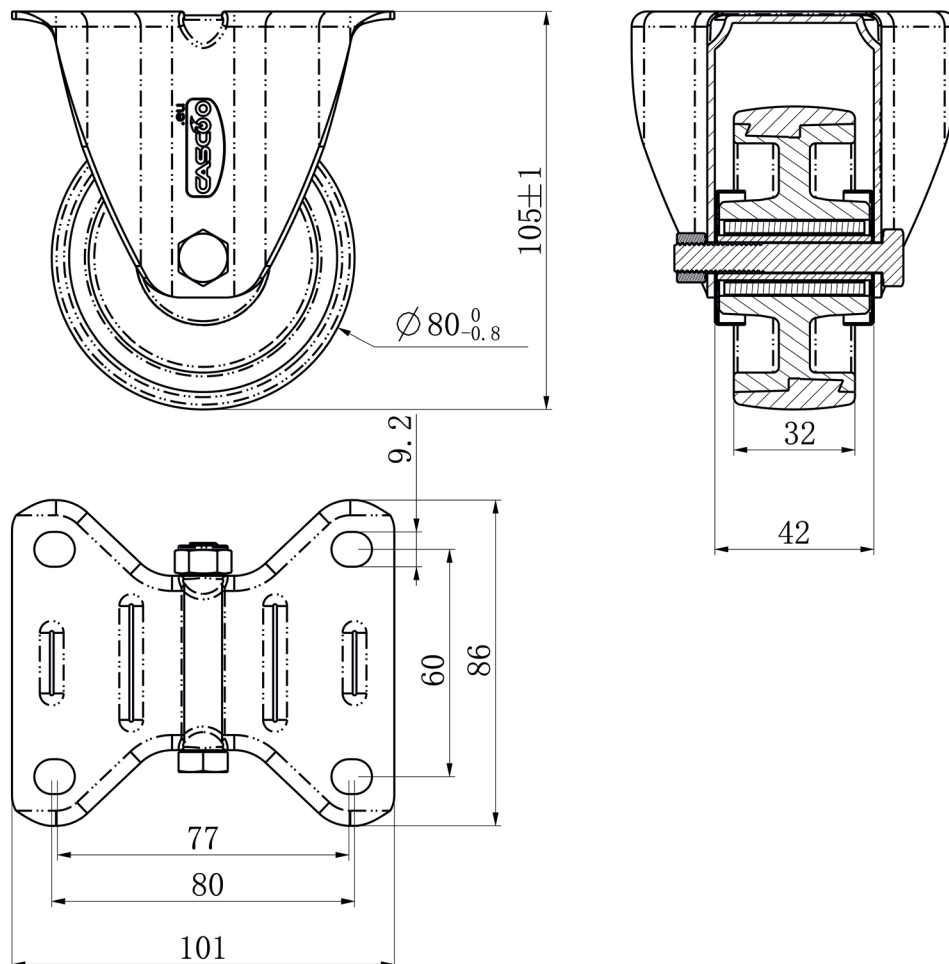

**CASCOO Europe GmbH**

Lütke Haar 15 • 59602 Rüthen • Germany  
+49 2952 - 970629-0  
info@cascoo.eu • www.cascoo.eu